

# TECHNICAL BULLETIN

---


**#11** May 1, 1983

## E NOZZLE FOR 9418 MASK POSITIVE PRESSURE NOZZLE. FOR DEMAND STYLE XL SERIES SCBA/SAR FACEPIECE AND HOSE ASSEMBLIES

All demand or selectable pressure demand style nozzles must be removed and replaced by fixed pressure demand nozzles before being used in IDLH atmospheres.

New Positive Pressure Nozzle –  
Install in facepiece

Demand Nozzle – Remove from facepiece  
and discard

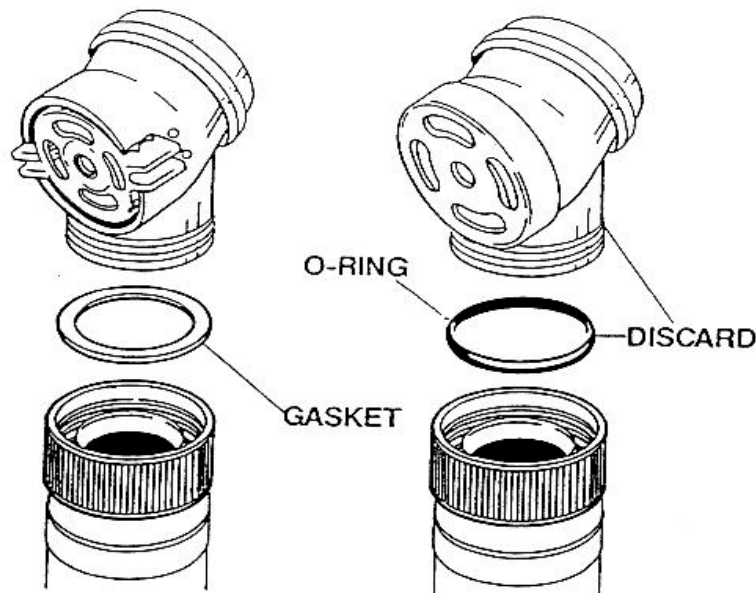

Remove and discard O-ring.  
Replace with Flat Gasket, P/N 8450-90.

**IMPORTANT NOTE:**

Conversion of the facepiece includes installation of a new positive pressure nozzle assembly (P/N 9411-34). It is extremely important that the O-ring in the upper end of the convoluted hose be replaced with the new flat gasket. P/N 8450-90